

# FD950

5MP Fixed Camera, 2.7-12mm motorized lens, H.265/H.264, IR

## DESCRIPTION

The FD950 is a robust outdoor fixed dome camera with built-in IR illumination providing clear images under any lighting condition. The camera has multi-stream capabilities for simultaneously streaming of H.265/H.264/MJPEG. Multiple combinations of resolution and frame rate can be configured. To have a secured network environment, FD950 is capable of streaming out by HTTPS protocol.

## FEATURES

---

Max 2560x1920 Resolution

---

5MP 30fps, 1080p 60fps

---

Quad stream H.264, H.265 and MJPEG

---

Secured Streaming

---

Embedded Video analytics

---

Built-In Gyro, EIS

---

Bi-directional Audio

---

Built-in IR illuminator

---

ONVIF Profile S, G, T, M

---

IP66, IK10 vandal proof

---



## Description

### Multi-stream multi-codec

The camera has quad-stream capability for simultaneous streaming of H.265, H.264 and MJPEG. Multiple combinations of resolution, frame rate, and encoding can be configured to fit all possible live viewing and recording scenarios. The 5 Mpixel resolution is available at 25/30 fps still offering multiple exposure WDR (or HDR, in short) with the possibility to add a second stream.

### Open standards

Multiple options are available to easily integrate the FD950 to a video management system. In support of open standards, the camera is compliant with the ONVIF Profile Q for out of the box installation, profile G from local recording and profile S for streaming and VMS compatibility.

### Image enhancement

The FD950 utilizes advanced image processing technology. Crisp and detailed 5MP images with an extremely high dynamic range in real time due to multiple exposure HDR within one frame. Back-light and High-light compensation enhances image-visibility in difficult lighting situations. In addition the camera provides for 3D motion compensated noise reduction for the best images.

### Power source choices

The FD950 can be powered by 12 Vdc, 24 Vac, or over the network with PoE.

(c) 20250211



# Specs



## Analytics

	Object Removal, Stopped Vehicle
Event detections	External Input, Periodical Event, Tampering, Audio Detection, Manual Trigger, System boot, recording notification
Event Action	Alarm output, Record video clip to NAS/SD card, Send alarm message and image by E-mail/FTP, Send HTTP notification

## Audio

Capability	Two-way stereo audio
Audio Interface	1x 3.5 mm audio in (line in) ; 1x 3.5 mm audio out interface
Compression	G.711, G.726, AAC, LPCM

## Alarm

Input	1x
Output	1x
Operational modes	Motion detection, Tampering alarm, Alarm I/O

## Network

Communication Interface	10/100 Mb (RJ45)
Network protocols	IPv4/IPv6, HTTP, HTTPS (TLS1.2), 802.1x, Qos, FTP, SMTP(SSL), UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP/UDP, SRTP, TCP/IP, IGMP(v2/v3), DHCP, PPPoE, SSL/TLS, ONVIF Profile S/G/T/M, Siqura Protocol
Security	User authentication, Syslog, Digest authentication (RTSP, HTTP), HTTPS encryption (TLSv1.2/v1.3), IEEE 802.1x port-based network access control, IP filtering, EAP-TLSv1.2/v1.3, SRTP, Signed firmware, Secured bootup
Web Viewer	Internet Explorer 11, Microsoft Edge, Google Chrome, Mozilla Firefox

## General

Protection Level	IP66, IK10
Material	Die cast aluminum and Plastic
Edge Storage	Built-in micro SD/SDHC/SDXC slot, up to 512 GB
Power	24 VAC +/- 10%; 12 VDC +/- 10% (terminal block); PoE (IEEE 802.3af class 0, Max. 12.95W)
IR illumination	850nm IR LEDs, 50m IR Viewable Length
Operating temperature	-40°C to 60°C (-22°F to 140°F)
Relative humidity (Operating)	5 to 95%, No condensation
Storage temperature	-20°C to 70°C (-4°F to 158°F)
Relative humidity (Storage)	10 to 60%
Dimensions(camera body)	diameter133.8x117.4 mm
Weight	760g
Colour	RAL 9003 (Signal white)

## Ordering Information


FD950	5MP fixed dome, 2.7-12mm motorized, H.265/H.264/MJPEG, P-iris, IR, IK10, IP66
CM13/FD	Flush mount kit for FD800, FD910, FD950 and FD980 series

# Specs



## Ordering Information

TA01/FD	Tube adapter/pendant mount for FD800, FD910, FD950 and FD980 series
WM19/FD	Wall mount for FD800, FD910, FD950 and FD980 series
DC21	Dome cover, transparent, vandal proof, for FD910, FD950, FD980
DC21S	Dome cover, smoked, vandal proof, for FD910, FD950, FD980

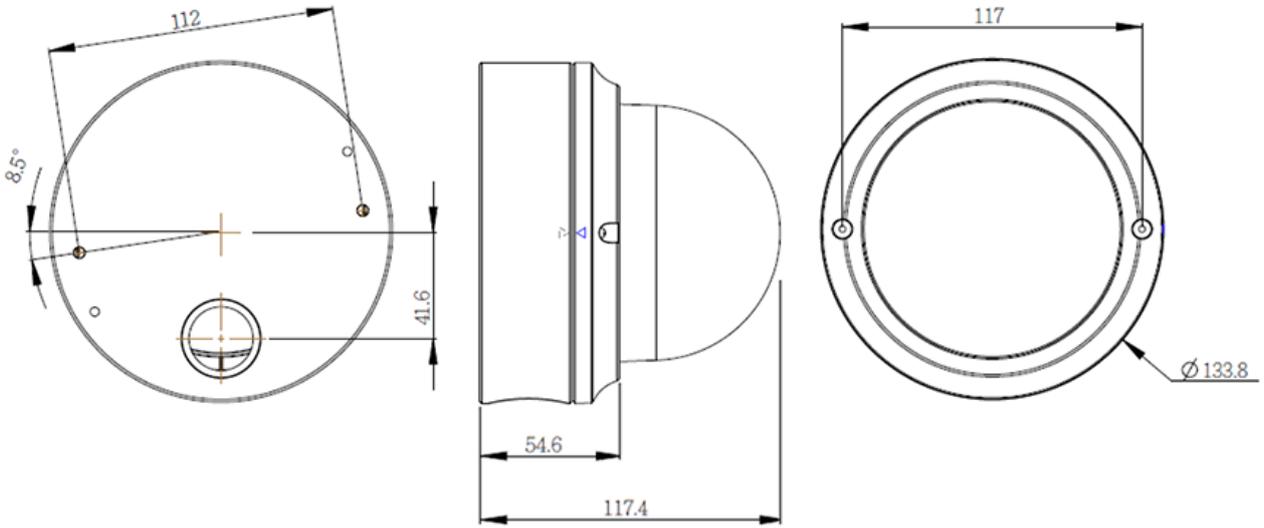

## RELATED



**TKH Security WM22**  
Wall mount, for FD360v2, FD950, FD980



**TKH Security CM13/FD**  
Flush mount kit for FD800, FD910, FD950, FD980 series



**TKH Security TA27**  
Tube adapter/pendant mount for FD810, FD820v2, FD910, FD950, FD980, FD360



**TKH Security DC21**  
Dome cover, transparent, vandal proof, for FD910, FD950, FD980



**TKH Security DC21S**  
Dome cover, smoked, vandal proof, for FD910, FD950, FD980