EX/SA-FTK01


DIN-rail Fiber Optic Cable Termination Kit for SM or MM fiber

DESCRIPTION

DIN-rail kit to terminate Fiber Optic single-mode or multi-mode cable in the EX-JB01 junction box.

FEATURES


- DIN-rail mount Fiber Optic Splice box
- High-impact plastic (ABS)
- 4x semi-tight buffered pigtails
- For both LC and SC termination
- Robust and easy to install

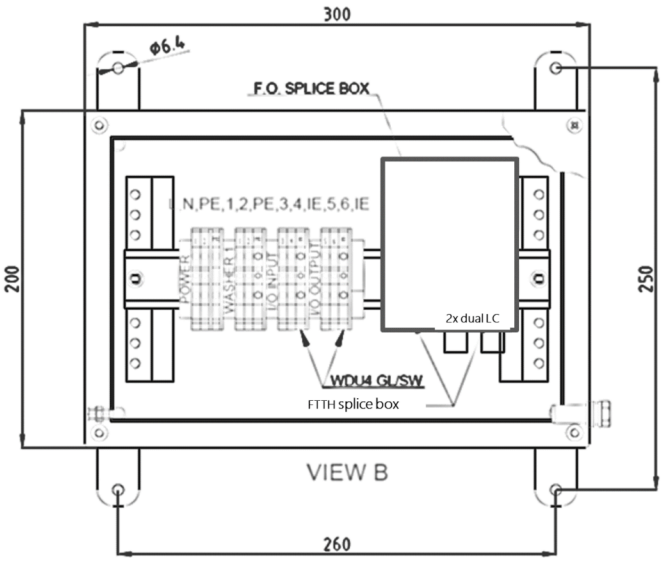


EX-FTK01-2SM	
Optical power rating	Shall comply Class 1 optical radiation
Body material	ABS
Number of ports	1 or 2.
Fibre type	single mode OS2
Pig tails	2x single mode 0.9 mm OS2 semi-tight buffered with LC connector
	2x single mode 0.9 mm OS2 semi-tight buffered with SC connector
Adapter	1x duplex LC/LC adapter
	2x SC/SC adapter
Mounting	DIN-rail
Size (h x w x d)	100 x 80 x 23
Weight	0.565 kg

EX-FTK01-2MM	
Optical power rating	Shall comply Class 1 optical radiation
Body material	ABS
Number of ports	1 or 2.
Fibre type	multimode OM1
Pig tails	4x multimode 0.9 mm OM1 semi-tight buffered with SC connector
Adapter	2x SC/SC adapter
Mounting	DIN-rail
Size (h x w x d)	100 x 80 x 23
Weight	0.565 kg

Ordering information	
EX-JB01	316L Ex e termination box for Ex cameras
EX/SA-FTK01-2SM	DIN-rail Fiber Optic Cable Termination Kit for SM (Dual SC and LC)
EX/SA-FTK01-2MM	DIN-rail Fiber Optic Cable Termination Kit for MM 2x SC

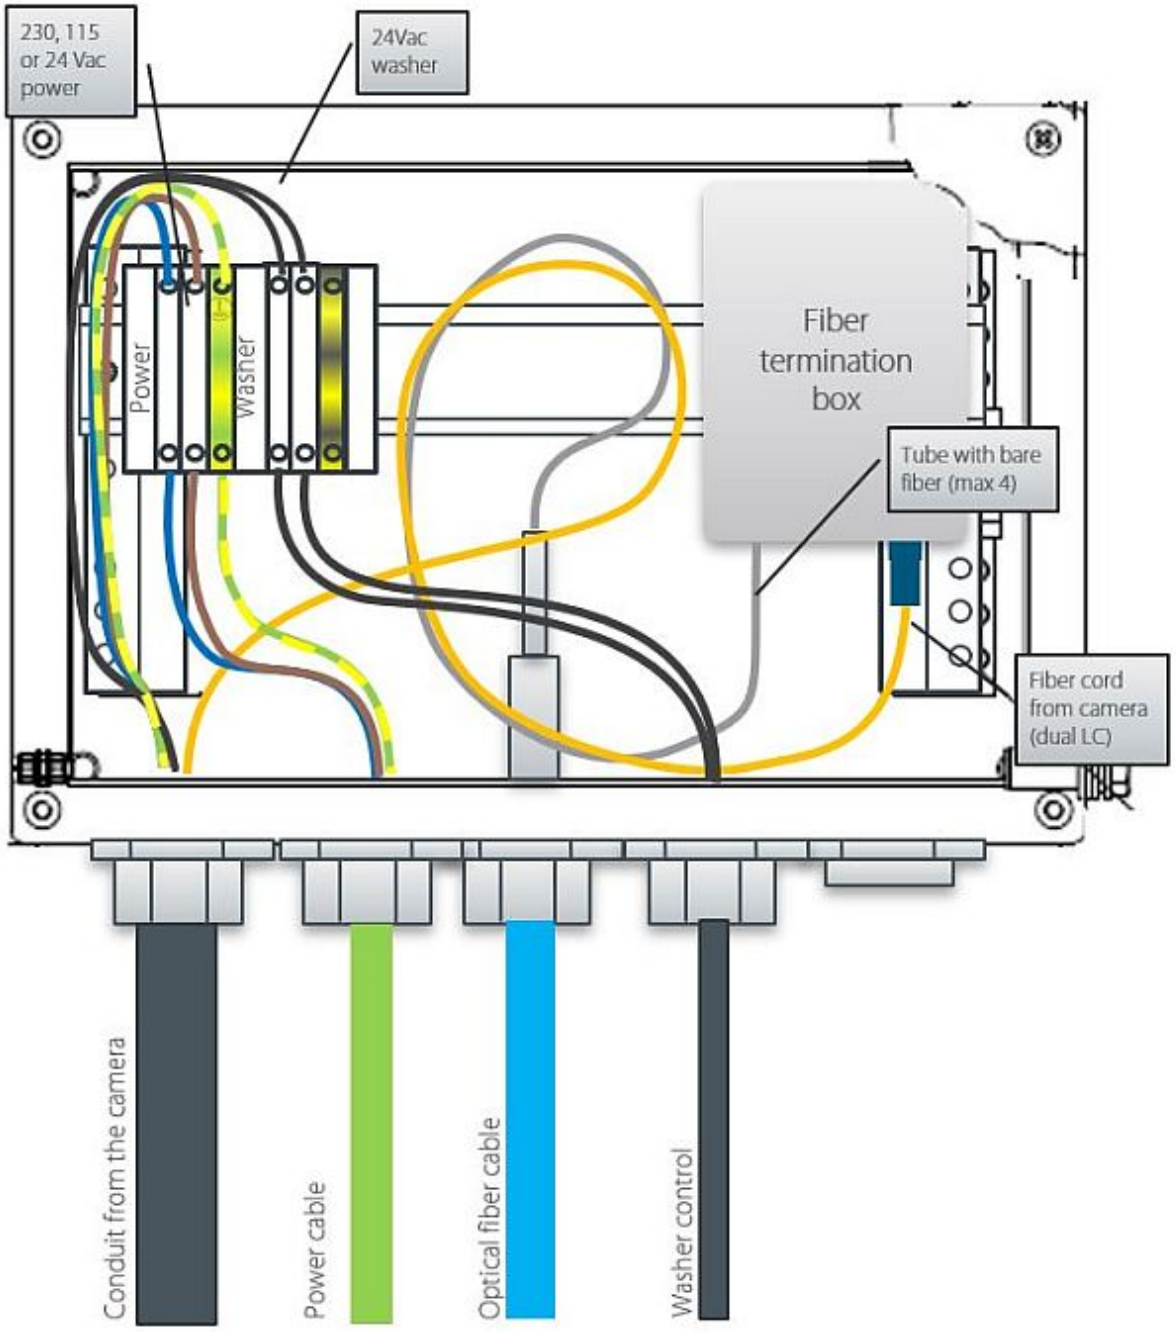
230, 115
or 24 Vac
power
24Vac
washer
Power
Washer
Fiber
termination
box
Tube with bare
fiber (max 4)
Fiber cord
from camera
(dual LC)
Conduit from the camera
Power cable
Optical fiber cable
Washer control

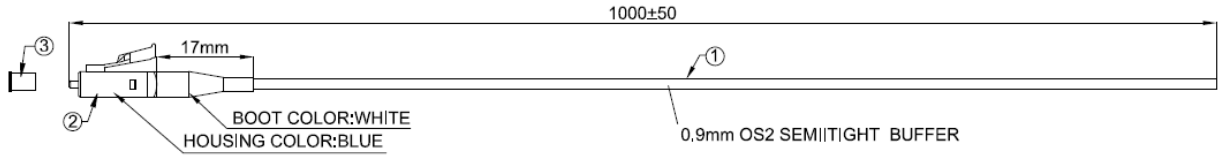

LC/UPC SM CONNECTOR

RELATED



Siqura EX-JB01
316L Ex e termination box for EX cameras