

PD950DC

5 MP High-speed outdoor PTZ dome camera 40x zoom

DESCRIPTION

The PD950DC is a 5MP IP outdoor PTZ camera with 40x optical zoom lens. Utilizing the latest Technology, PD950DC efficiently ensures the low bandwidth by real-time H.264/H.265 streams. Its IP66 waterproof and IK10 vandal resistant housing make it suitable for outdoor usage. The high-speed pan, tilt, and zoom mechanism and auto-focus give instantaneous and stable focused images.

FEATURES

1/2.7 inch Progressive scan CMOS imager

Quad stream H.264, H.265 and MJPEG

Max 5MP 30fps, 1080p 60fps

40x optical zoom, 10x digital zoom

20° tilt above horizon without optical distortion

Secured Streaming, IEEE 802.1x authentication

120 dB WDR (HDR)

Built-In Gyro, EIS

PT servo feedback

ONVIF Profile S, G, T, M



Description

Multi-stream high definition

The camera has the capability to stream simultaneous 4 video streams in H.265, H.264 and MJPEG. Multiple combinations of encoding, resolution and frame rate can be configured to satisfy different live viewing and recording scenarios. Each selected resolution-frame rate combination can be freely set to a stream number. Also, the optimized encoding H.265/HEVC streaming provides the clear images with less transmission bandwidth and storage capacity required.

Open standards

Multiple options are available to easily integrate the PD950DC to a video management system. In support of open standards, the PD950DC is compliant with a range of VMS's, it supports ONVIF (Profiles S, G, T, M) and the Siquira API.

PT Servo feedback

The PD950DC pan and tilt motors are controlled by servo feedback, keeping track of the PTZ position at all times. No more drifting PTZ head due to shocks, vibration or vandalism. When the head is forced from its position, it will return immediately.

Power source choices

The PD950DC can be powered with 24 Vac or over the network with PoE+ sources.

(c) 20240306

Camera

Image Sensor	1/2.7" Progressive CMOS
Effective pixels	2720x1976 (5MP)
Minimum scene illumination	Color: 0.05 lux, B/W: 0.005 lux, 0lux with IR illumination on, F1.6
Shutter Speed	1 sec. to 1/10,000 sec.
Lens	40x, 4.3-170mm, Piris, F1.6
Field of view	1.85° to 64° horizontal, 1.3° to 48.1° vertical
Focus Control	Autofocus
Slow Shutter	Supported
Day/Night	Automatic IR-cut Filter

PTZ

Pan range	360° Continuous rotation
Tilt range	-20° to +90°
Tilt travel	-20° to +200° (Mechanical Flip)
Number of presets	256
Preset speed	300°/s
Manual speed	0.1°/s to 90°/s Pan; 0.1°/s to 55°/s Tilt
Preset accuracy	0.16°
Features	Speed by zoom
Sequence Scan	8
Cruise Scan	8
Autopan	4
Body material	Aluminum alloy, ABS
Internal demister/heater	Standard

Video

Video Compression	H.265 (Main Profile) / H.264 (High Profile/Main Profile) / MJPEG
Max. Resolution	2688x1944 30fps(WDR Pro on), 1920x1080 60fps (WDR Pro off)
Supported Resolution	2688x1944 (5MP), 2560x1920 (5MP), 1920x1080, 1280x1024, 1280x720, 1360x768, 800x600, 640x360, 480x272
Frame Rate	25/30fps, 50/60fps
Number of simultaneous streams	Quad streams

Max. Streaming

30fps (dual shutter WDR)	2688x1944:1280x720
Bitrate Control	Constant bit rate (CBR), variable bit rate (VBR), Smart bitrate
Number of video output streams	Up to 10 (RTSP)
Video output	1 Vp-p; 2-pin to BNC patch cable (For test/installation only)
Region of interest	Support

Image

Wide dynamic range	120dB
White Balance	Auto (normal, wide, all), Smart, One push, Smart Touch, Manual

Specs



Image	
Image Setting	Saturation, Brightness, Contrast, Sharpness, Backlight Compensation, Highlight Compensation, WDR, Exposure control, Gain, Defog
	Auto Iris, AGC
SNR	>52dB
Day/Night Switch	Auto/Scheduled/Triggered by Alarm In
Image Enhancement	2DNR, 3DNR, ColorNR
Image Stabilization	Gyro, support
Digital Zoom	10x
Image Rotation	90°, 180°, 270° rotation
privacy masks	16x, Color & Mosaic
Text and picture overlay	Date & time, 3x line (54 characters each), Preset title, Image, Image transparency, Text string, Zoom ratio, Compass and Azimuth

Analytics	
Smart Analytics	Abandoned Object, Intrusion Detection, Camera Sabotage
	Wrong Direction, Loitering Detection, Object Counting
	Object Removal, Stopped Vehicle, Face Detection
	Face Recognition, License Plate Recognition
	Person detection and auto tracking
Event detections	External Input, Periodical Event, Tampering, Audio Detection, Manual Trigger, Recording Notification
Event Action	Alarm output, Record video clip to NAS/SD card, Send alarm message and image by E-mail/FTP, Send HTTP notification

Audio	
Capability	Two-way stereo audio
Audio Interface	1x 3.5 mm audio in (line in) ; 1x 3.5 mm audio out interface
Compression	G.711, G.726, AAC, LPCM

Data	
Serial port	RS485
Protocols	Pelco-D, Pelco-P, Diamond protocol

Alarm	
Input	4x
Output	2x
Operational modes	Cell-based motion detection, Network Failure Detection, Tampering alarm, Alarm I/O

Network	
Communication Interface	10/100/1000 Mb (RJ45)
Network protocols	IPv4/IPv6, HTTP, HTTPS (TLS1.2), 802.1x, Qos, FTP, SMTP(SSL), UPnP, SNMP(v1/v2/v3/Traps), DNS, DDNS, NTP, RTSP, RTCP, RTP/UDP, TCP/IP, IGMP(v2/v3), DHCP, PPPoE, SSL/TLS, Pelco D (TCP/UDP), Diamond (TCP/UDP), NTCIP (TCP/UDP),

Network	
	ONVIF Profile S/G/T/M, Siqua Protocol
Security	User authentication, Syslog(SSL/TLS), Digest authentication (RTSP, HTTP), HTTPS encryption (TLS1.2); IEEE 802.1x port-based network access control, IP filtering, Brute attack protection
Web Viewer	Internet Explorer 11, Microsoft Edge, Google Chrome, Mozilla Firefox


Environmental	
Ingress protection level	IP66
Impact rating	IK10
Overvoltage protection	Lightning Protection, Surge Protection and Voltage Transient Protection
Operating temperature (NEMA TS-2)	-40 °C to +74 °C (-40 °F to +165 °F)
Relative humidity (Operating)	10 to 90%, No condensation
Storage temperature	-20°C to 70°C (-4°F to 158°F)
Relative humidity (Storage)	10 to 60%
MTBF (@40°C)	>130,000 h
Power supply	24 VDC, 24 VAC +/- 10%; PoE+ (802.3at, class 4)
Power consumption	Max. 25.4 W

Mechanical	
Interfaces	
- Ethernet	RJ45
- Alarm in / out	4x / 2x Terminal Block
- 24Vdc, 24Vac	Terminal Block
- Audio in / out	terminal Block
- Video out	BNC Connector
- RS485	Terminal Block
Dimensions	diameter 210 x 279 mm with Sunshield
Weight	2.9 kg
Color	RAL 9003 (signal white)

Ordering Information	
PD950DC	5 MP High-speed outdoor PTZ dome camera 40x zoom
WM27	Wall mount, for PD9x0
CM27	Ceiling mount 25cm for PD9x0
CM27A	Extension 25cm for CM27
WM12	Wall mount for PD110x and PD9x0 PTZ dome series
WM12B	Wall mount incl. junction box for PD110x and PD9x0 series
WM16	Gooseneck bracket for PD110x and PD9x0 PTZ dome series
WM17	Corner mount for PD110x and PD9x0 PTZ dome series
WM17B	Corner mount incl. junction box for PD110x and PD9x0 series
PM06	Pole mount, for PD9x0-series, 1100-series
PM07	Pole mount for PD110x and PD9x0 PTZ dome series
PM07B	Pole mount incl. junction box for PD110x and PD9x0 series

Ordering Information

PM08	Parapet wall mount for PD110x and PD9x0 PTZ dome series
PTM02	Bracket adapter for PD9x0 series
CM11	Ceiling mount for PD110x and PD9x0 PTZ dome series
CM12	Ceiling mount for PD110x and PD9x0 PTZ dome series, 50 cm
CM15	Ceiling mount for PD110x and PD9x0 PTZ dome series, 25 cm
DC34	Dome cover, transparent, vandal proof, for PD900, PD950DC
DC34S	Dome cover, smoked, vandal proof, for PD900, PD950DC

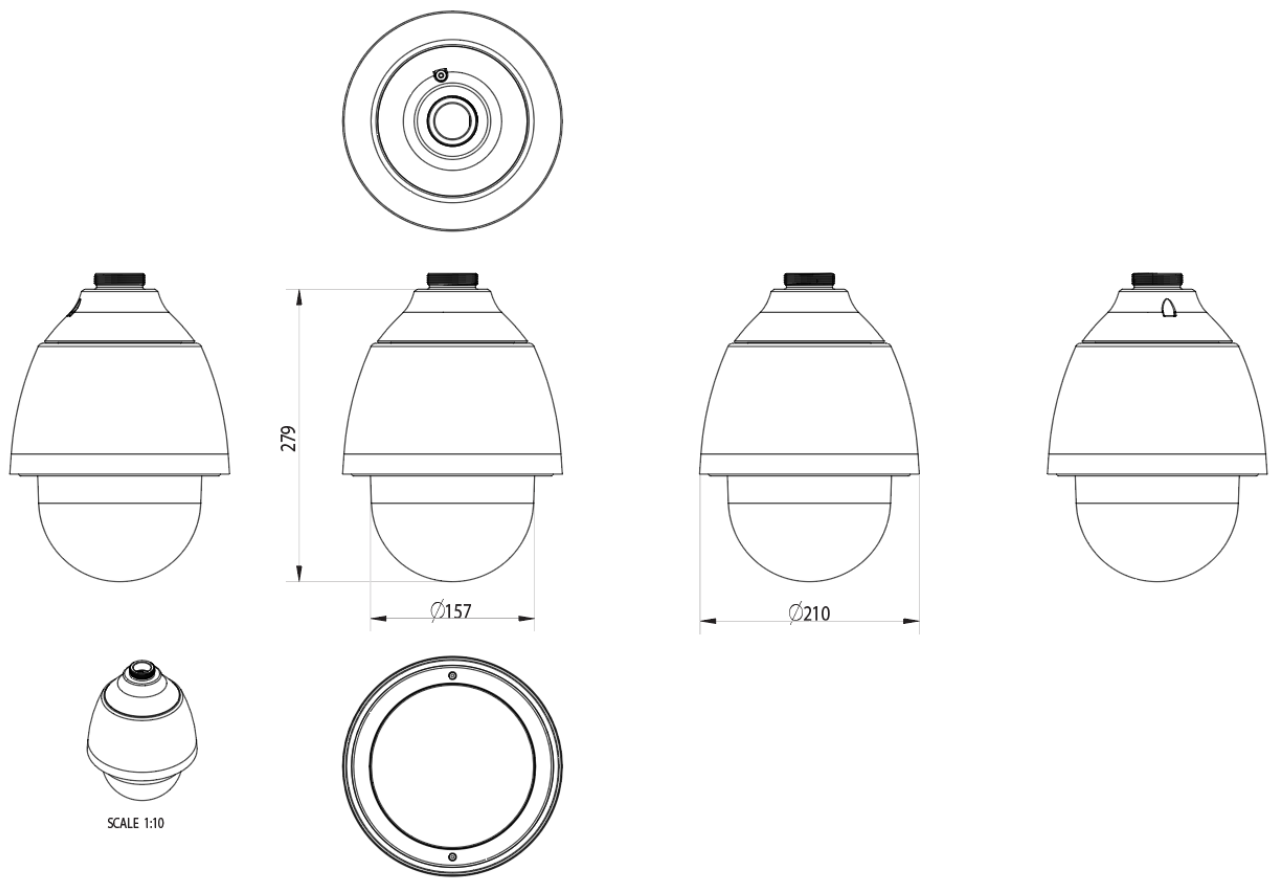

RELATED



TKH Security WM27
Wall mount, for PD9x0



TKH Security PM01
Pole mount, for WM01A, WM27



TKH Security WM05
Corner mount, for WM01A, WM27



TKH Security JB27
Junction box, for WM01A, WM27



TKH Security CM27
Ceiling mount 25cm for PD9x0



TKH Security CM27A
Extension 25cm for CM27



TKH Security CTA01
Cable tail adapter for PD900, PD910, PD920, PD950DC, PD950NW



TKH Security DC34
Dome cover, transparent, for PD900 and PD950DC, 6.2"



TKH Security DC34S
Dome cover, smoked, for PD900 and PD950DC, 6.2"