

TL3-UN-B

TANLock Rack handle - RFID

DESCRIPTION

iProtect not only offers a modern and flexible Access Management System to secure buildings and other locations, but also offers an efficient way to protect your knowledge, processes and data through a central and tamper-proof locking system, the "TANLock Rack handle".

TANLock Rack handle may be used for all areas which need to be secured such as, data centers, control cabinets on production plants or in your critical infrastructure. With implementing this system, you ensure that only authorized persons have access to your business-critical areas. Furthermore, you can monitor the status of each individual cabinet door online. TANLock Rack handle, is available in the colors black and silver.

FEATURES

Suitable for all universal Racks

RFID Technology: Mifare DESfire / UID

OK button to confirm remote opening

Can be powered-up incase of emergency via USB-C



Power supply & consumption

Voltage	PoE : IEE 802.3af-2003
Power consumption	min. 4.8W

Measure

Measurements Housing	239,0 x 40,0 x 28,0 mm
Weight	680g

Environment

Rating	IPXX Optional IP54 IP65
Operating temp	-40 65C
Operating humid	5 95% relative humidity, non-condensing
Storage temp	-40 85C

Inputs

Digital input IN0	Door status
Digital input IN1	Side panel status
USB-C	External power via USB-C connector

Cardreader

Standard	ISO 14443-A
Frequencies	13,56MHz
Type	Mifare DESFire and UID
Reading Distance	0-30mm (normal operation)

Indicators

ORANGE LED	Handle rotation status
BLUE LED	Access status
RED LED	Alarm status

Certification

Certification	ElectricEMC / CE
---------------	------------------

Variants

TL3-UN-B	TANlock RFID
TL3-UN-PIN-B	TANlock RFID, PIN
TL3-UN-MO-B	TANlock RFID, MO
TL3-UN-PIN-MO-B	TANlock RFID, PIN MO
TL3-UN-S	TANlock Rittal silver
TL3-UN-PIN-S	TANlock PIN Rittal silver
TL3-UN-MO-S	TANlock MO Rittal silver
TL3-UN-PIN-MO-S	TANlock PIN MO Rittal silver
	TANlock Vertiv
	TANlock PIN Vertiv

Specs



Variants

	TANlock MO Vertiv
	TANlock PIN MO Vertiv

Colours


xxx-xxxx-S	Black
xxx-xxxx-B	Silver

Mechanical Override


Cylinder size

Door contacts

512-2013	TANlock Door contact 2m
512-2014	TANlock Door contact 3m
512-2015	TANlock Door contact 0.08m

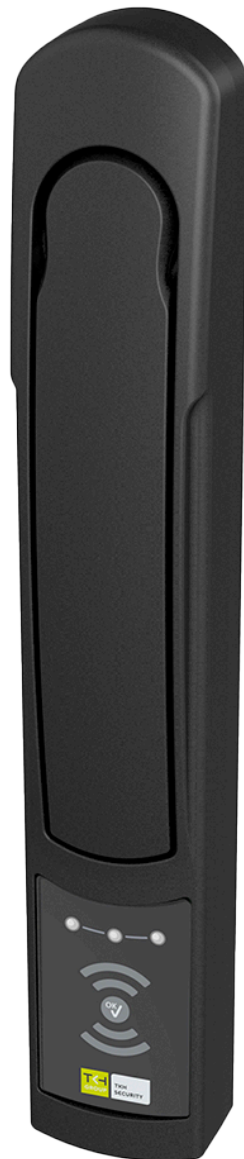



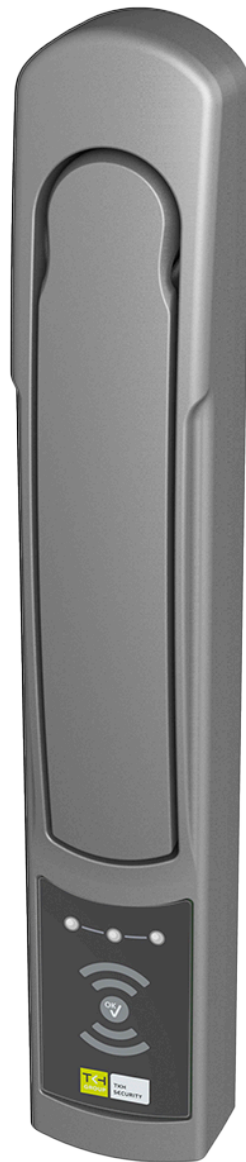



RELATED

**FATH TL3-UN-Pin-B**

TANLock Rack handle - RFID with PIN

**FATH TL3-UN-MO-B**

TANLock Rack handle - RFID / mechanical overwrite

**FATH TL3-UN-Pin-MO-B**

TANLock Rack handle- RFID with PIN / mechanical overwrite

**FATH TL-DC-2m**

TANLock Rack handle - Door contact 2m

**FATH TL-DC-3m**

TANLock Rack handle - Door contact 3m

**FATH TL-DC-10cm**

TANLock Rack handle - Door contact 10cm