

TL3-UN-PIN-S

TANLock Rack handle - RFID with PIN

DESCRIPTION

iProtect not only offers a modern and flexible Access Management System to secure buildings and other locations, but also offers an efficient way to protect your knowledge, processes and data through a central and tamper-proof locking system, the "TANLock Rack handle".

TANLock Rack handle may be used for all areas which need to be secured such as, data centers, control cabinets on production plants or in your critical infrastructure. With implementing this system, you ensure that only authorized persons have access to your business-critical areas. Furthermore, you can monitor the status of each individual cabinet door online. TANLock Rack handle, is available in the colors black and silver.

FEATURES

Suitable for all universal Racks

RFID Technology: Mifare DESfire / UID

OK button to confirm remote opening

Can be powered-up incase of emergency via USB-C

Two-factor authentication with PIN (4 digit pin pad)



Power supply & consumption

Voltage	PoE : IEE 802.3af-2003
Power consumption	min. 4.8W

Measure

Measurements Housing	239,0 x 40,0 x 28,0 mm
Weight	680g

Environment

Rating	IPXX Optional IP54 IP65
Operating temp	-40 65C
Operating humid	5 95% relative humidity, non-condensing
Storage temp	-40 85C

Inputs

Digital input IN0	Door status
Digital input IN1	Side panel status
USB-C	External power via USB-C connector

Cardreader

Standard	ISO 14443-A
Frequencies	13,56MHz
Type	Mifare DESFire EV1 and UID
Reading Distance	0-30mm (normal operation)
Optional PIN pad	4 digit

Indicators

ORANGE LED	Handle rotation status
BLUE LED	Access status
RED LED	Alarm status

Certification

Certification	ElectricEMC / CE
---------------	------------------

Variants

512-2001	TANlock RFID
512-2002	TANlock RFID, PIN
512-2003	TANlock RFID, MO
512-2004	TANlock RFID, PIN MO
512-2005	TANlock Rittal silver
512-2006	TANlock PIN Rittal silver
512-2007	TANlock MO Rittal silver
512-2008	TANlock PIN MO Rittal silver
512-2009	TANlock Vertiv

Specs



Variants

512-2010	TANlock PIN Vertiv
512-2011	TANlock MO Vertiv
512-2012	TANlock PIN MO Vertiv

Colours

xxx-xxxx-S	Black
xxx-xxxx-B	Silver


Mechanical Override

Cylinder size

Door contacts

512-2013	TANlock Door contact 2m
512-2014	TANlock Door contact 3m
512-2015	TANlock Door contact 0.08m



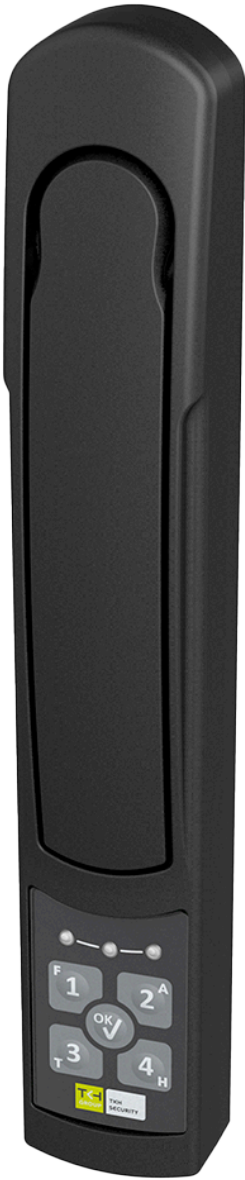













RELATED



FATH TL3-UN-B
TANLock Rack handle - RFID



FATH TL3-UN-MO-B
TANLock Rack handle - RFID / mechanical overwrite



FATH TL3-UN-Pin-MO-B
TANLock Rack handle- RFID with PIN / mechanical overwrite



FATH TL-DC-2m
TANLock Rack handle - Door contact 2m



FATH TL-DC-3m
TANLock Rack handle - Door contact 3m



FATH TL-DC-10cm
TANLock Rack handle - Door contact 10cm
